

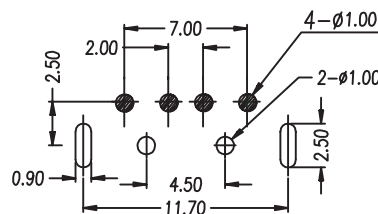
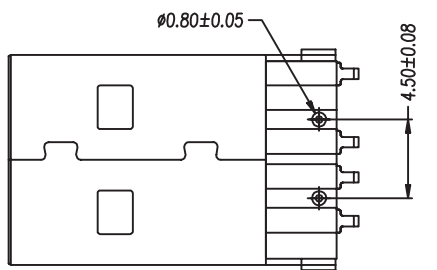



RoHS Compliant

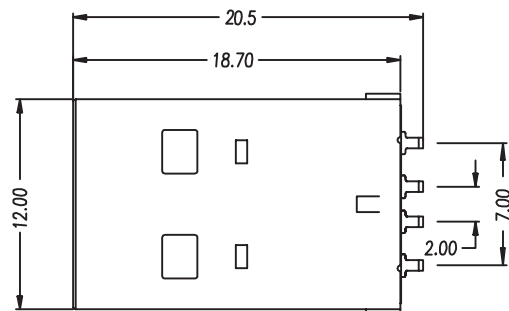

RECOMMEND PCB LAYOUT

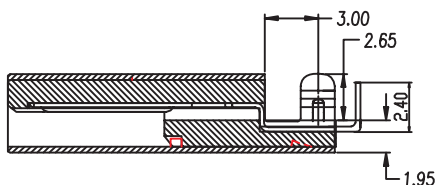

SPECIFICATIONS

1)Electrical:

- 1.1 Contact Resistance: 30 m Ω Max
- 1.2 Insulation Resistance: 1000M Ω Min
- 1.3 Withstanding Voltage: 500V DC
- 1.4 Current rating 1.5AMP Max.
- 1.5 Temperature Range: -55°~ +105°

2) Material :

- 2.1 Shell : Steel Alloy, T=0.30mm
Plating: Ni 100 u" Min.
- 2.2 Contact: Copper Alloy , T=0.25mm
Plating: Au 5u" ON CONTACT AREA

3)Finishing:

- 3.1 Plating: Au 5u" ON CONTACT AREA
- 3.2 Shell: Nickel-plating

6					PART NAME	USB JACK	LAKE-VIEW ELECTRONICS CO., LTD.			
5					PART No.	U-AM412X10D				
4					DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3	SHELL	1	Steel	Ni-Plating	CHECKED BY	DELIANG LIU	VER	1.2	ANGLES	$\pm 1.5^\circ$
2	TERMINALS	5	Copper	Tin-Plating	APPROVED BY	David Chen	SHEET	1 OF 1	TOLERANCE	30 $\leq$ L ± 0.50
1	HOUSING	1	Hi-Temp UL94V-0				DATE	'09.07.13		10 $\leq$ L $\leq$ 30 ± 0.30
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L $\leq$ 10 ± 0.20