



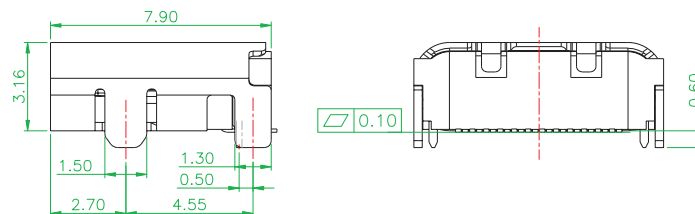
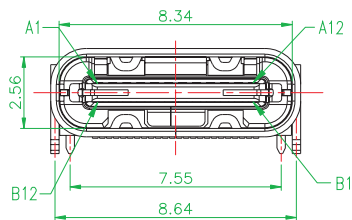


RoHS Compliant

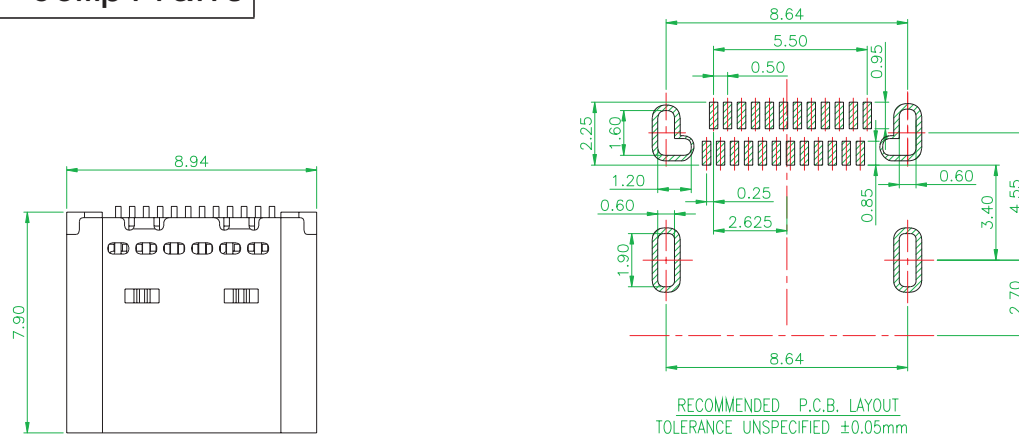

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0

CONTACT: COPPER ALLOY.

GOLD PLATED 30u" Min ON CONTACT AREA, 100u" Min TIN (LEAD FREE) ON SOLDER AREA,

SHELL: SUS304-H, T=0.30 $\pm$ 0.03mm

50u" NICKEL PLATING OVER ALL.

SHIELD: SUS304-H, T=0.12 $\pm$ 0.03mm

2.MECHANICAL:

INSERTION: 5~20N.

EXTRACTION: 8~20N.

DURABILITY: 10000 CYCLES

3.ELECTRICAL:

CURRENT: 1.5A MIN FOR VBUS;

0.25A MIN FOR OTHER.

WITHSTANDING VOLTAGE: 100V AC.

CONTACT RESISTANCE: 40m Ω MAX.

INSULATION RESISTANCE: 100M Ω MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -55°C ~ +85°C

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6					PART NAME	USB JACK	* LV * LAKE-VIEW ELECTRONICS CO., LTD.			
5					PART No.	3.1 C TYPE				
4					DESIGNER	CU3-H224-BF	VIEW		UNIT	mm
3					CHECKED BY	YAOFEI WANG	VER	1.2	ANGLES	$\pm 1.5^\circ$
2					APPROVED BY	DELIANG LIU	SHEET	1 OF 1	TOLERANCE	30 $\leq$ L ± 0.30
1						David Chen	DATE	'15.10.13		10 $\leq$ L $\leq$ 30 ± 0.20
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L $\leq$ 10 ± 0.20