





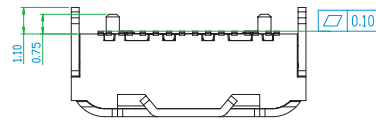
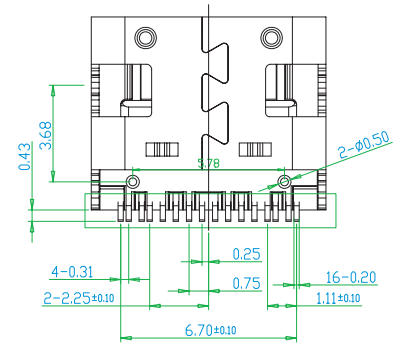


RoHS Compliant

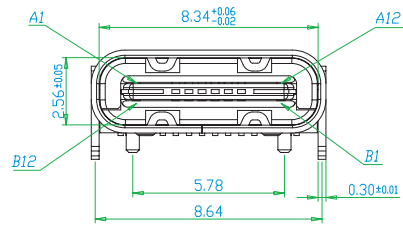

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

1-1. CONTACT RESISTANCE: 30mΩ MAX.

1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.

1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC


2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION FORCE :0.5-2.0KgF(REF.)

2-2. WITHDRAWAL FORCE :0.8-2.0KgF(REF.)

3. LIFE TEST: 10,000 CYCLES.

4. TO CONFORM TO THE KROONN HAZARDOUS SUBSTANCE FREE SPEC.

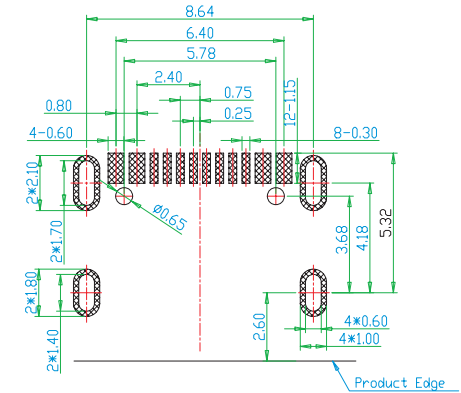

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6					PART NAME	USB 3.1 Type-C Female 16PIN	*LVE* LAKE-VIEW ELECTRONICS CO., LTD.			
5					PART No.	CU3-H316-C				
4	MD	1PCS	Hi-Temp UL94V-0 Black	Black	DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3	SHELL	1PCS	Steel	Ni-Plating	CHECKED BY	DELIANG LIU	VER	1.2	ANGLES	± 1.5°
2	TERMINALS	1SET	Copper	Au/Ni-Plating	APPROVED BY	David Chen	SHEET	1 OF 1	TOLERANCE	30≤L ± 0.30
1	HOUSING	1PCS	Hi-Temp UL94V-0 Black	Black			DATE	'16.09.13		10≤L≤30 ± 0.20
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ± 0.20