

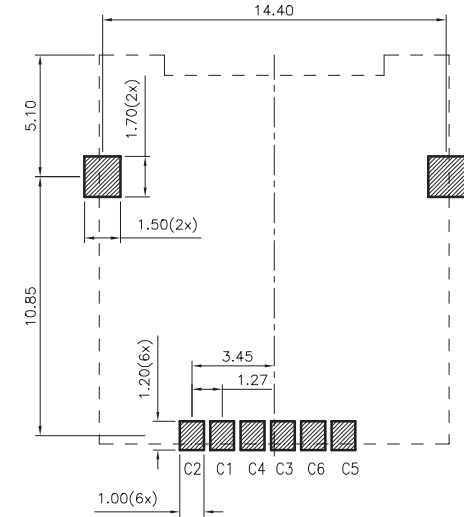
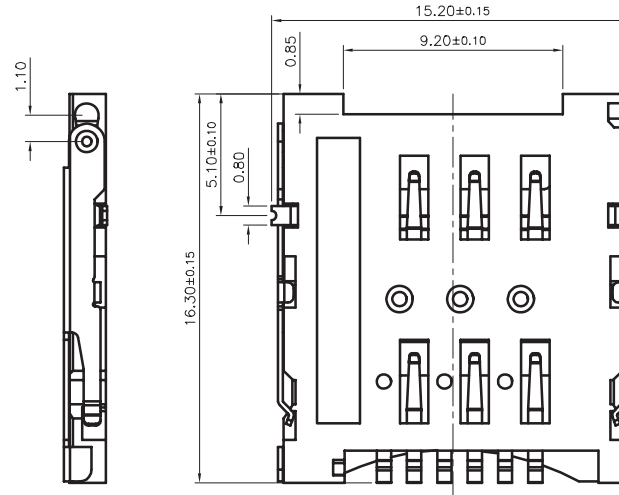
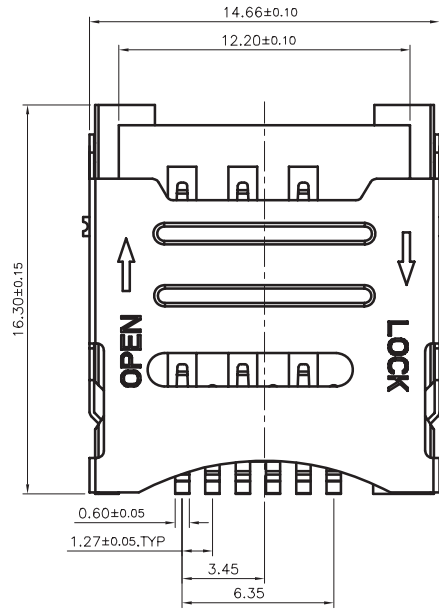



RoHS Compliant

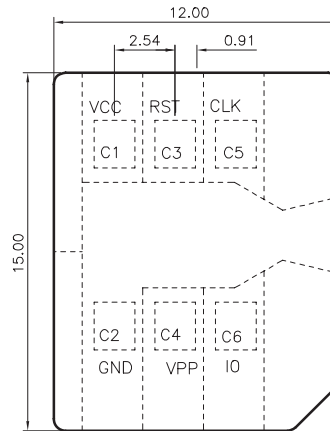

RECOMMENDED P.C. BOARD LAYOUT(TOP VIEW)  
GENERAL TOLERANCE:±0.05

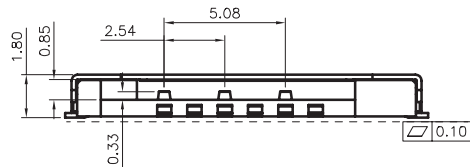

—NOTE—

- \*Electrical Characteristics:  
Contact Current Rating:0.5 Amperes.  
Dielectric Withstanding Voltage:AC500V r.m.s.  
Insulation Resistance:1000 MΩ Minimum.  
Contact Resistance:40 mΩ Maximum.
- \*Environmental:  
Operating Temperature:−25°C+90°C.
- \*Environmental:  
Mating Cycles:3,000 Insertions.
- \*Mechanical Characteristics:  
Card Push Insertion/Out Force:0.7N±0.20kgf.  
Contact Separation Force:0.20kgf Minimum.
- \*Material:  
Insulator:HI-Temp Plastic UL 94V-0 Rated.  
Contact:Copper Alloy(t=0.15mm).  
Shell:Stainless Steel(t=0.15mm).

6					PART NAME	SIM CARD SOCKET	<div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div> <div>LAKE-VIEW ELECTRONICS CO., LTD.</div>			
5					PART No.	SCS-1615-B				
4					DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3					CHECKED BY	DELIANG LIU	VER	1.0	ANGLES	±2°
2					APPROVED BY	DAVID CHEN	SHEET	1 OF 1	TOLERANCE	30≤L ±0.50
1							DATE	'11.5.17		10≤L≤30 ±0.40
NO. DESCRIPTION QTY MATERIAL PLATING										L≤10 ±0.25