
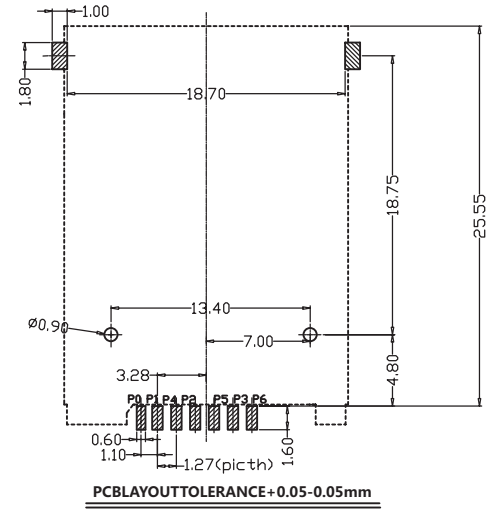
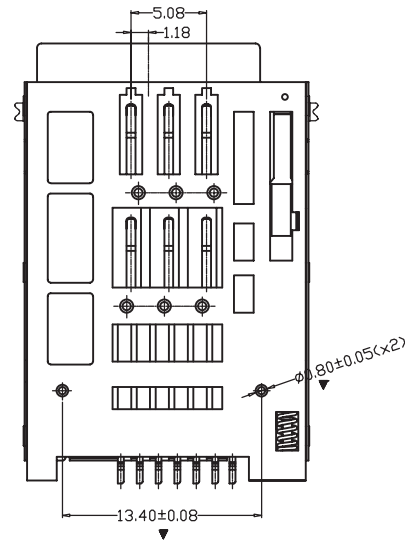


RoHS Compliant

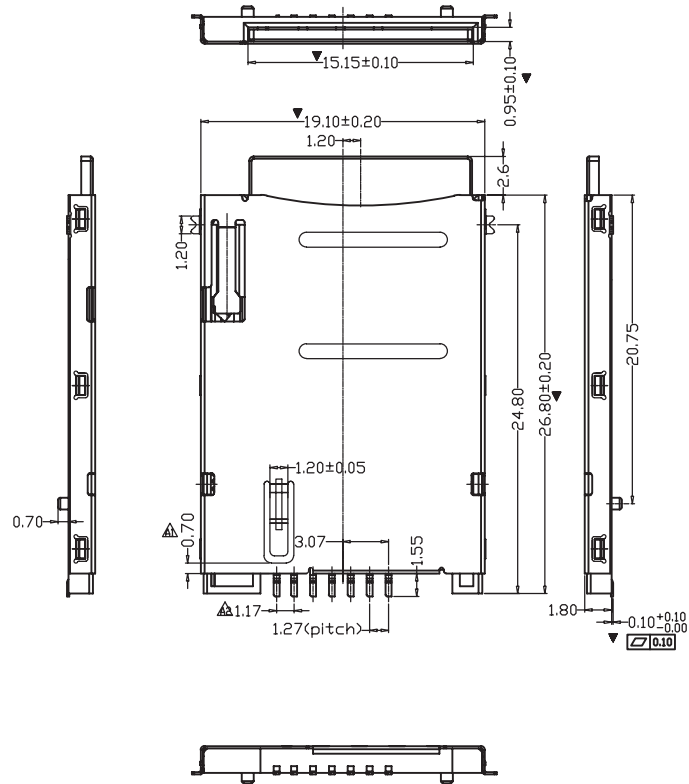

NOTE:

- 1.ELECTRICAL PERFORMANCE:
CONTACT RESISTANCE:100mΩ Max
DIELECTRIC STRENGTH:500V AC FOR 1 MINUTE.
- 2.MECHANICAL PERFORMANCE:
INSERTION FORCE:0.5kgf~1.5kgf
EJECTION FORCE:0.5kgf~1.5kgf
CYCLE LIFE:5000 TIMES.
3. PLATING:
3.1 Terminal contact: Gold plating contact point,
all over 50u" min nickel , 120u" min Tin on solder area
3.2 Shell: 50u"min nickel all over; Gold plating G/F welding zone

PINNO.	CONNECTOR TERMINAL
P0	SWITCH
P1	VCC: PWR SIGNAL AND GND
P2	RST: RESET SIGNAL
P3	CLK: CLOCK SIGNAL
P4	GND: RWR SIGNAL AND GND
P5	VPP: PROGRAMMING VOLTAGE
P6	IO: SERIAL DATA INPUT/OUTPUT

6					PART NAME	SIM CARD SOCKET	LAKE-VIEW ELECTRONICS CO., LTD.			
5					PART No.	SCS-1013-U				
4					DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3					CHECKED BY	DELIANG LIU	VER	1.0	ANGLES	±2°
2					APPROVED BY	DAVID CHEN	SHEET	1 OF 1	TOLERANCE	30≤L ±0.50
1							DATE	'10.5.16		10≤L≤30 ±0.40
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ±0.25