


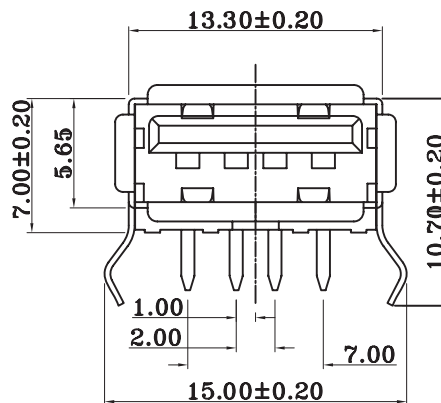


RoHS Compliant

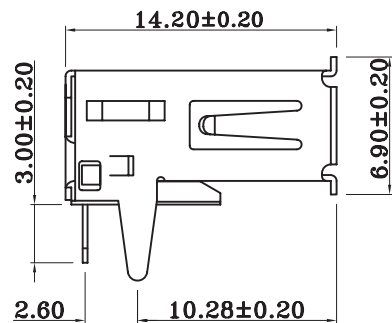

RECOMMEND PCB LAYOUT (± 0.05)

SPECIFICATIONS

1) Electrical:

- 1.1 Contact Resistance: 30 m Ω Max
- 1.2 Insulation Resistance: 1000M Ω Min
- 1.3 Withstanding Voltage: 500V DC
- 1.4 Current rating 1.5AMP Max.
- 1.5 Total Mating Force: 40N Max.
- 1.6 Total Unmating force: 10N Min.
- 1.7 temperature Range: -55°~ +105°

2) Material :

- 2.1 Shell : Copper Alloy, T=0.30mm
Plating: Ni 100 u" Min.
- 2.2 Contact: Copper Alloy , T=0.25mm
Plating: Au 1u" ON CONTACT AREA

6					PART NAME	USB JACK	LAKE-VIEW ELECTRONICS CO., LTD.			
5					PART No.	BU-422X10-C				
4					DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3					CHECKED BY	DELIANG LIU	VER	1.3	ANGLES	$\pm 1.5^\circ$
2					APPROVED BY	David Chen	SHEET	1 OF 1	TOLERANCE	30≤L ±0.30
1							DATE	'07.06.13		10≤L≤30 ±0.20
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ±0.20