

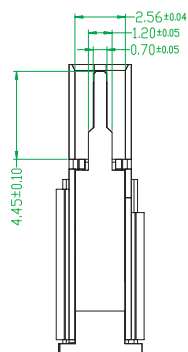

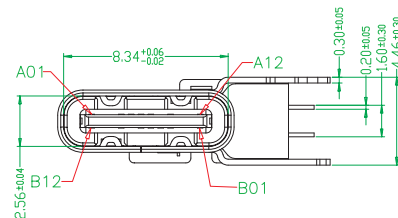

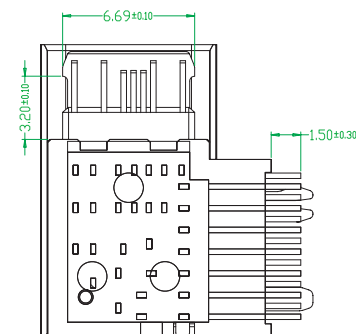




RoHS Compliant



截面 2-2

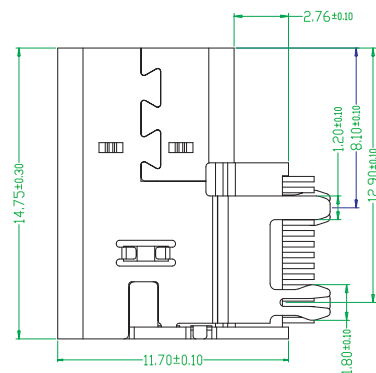

截面 3-3

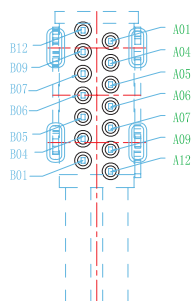

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6				NI Plated	PART NAME	USB 3.1 Type-C	LAKE-VIEW ELECTRONICS CO., LTD.				
5	SHELL	1PCS	STAINLESS STEEL	---							
4	MD	1PCS	HIGH TEMPERATURE PLASTIC	BLACK	DESIGNER	YAOFEI WANG	VER	1.2	ANGLES	± 1.5°	
3	CONTACT	1SET	COPPER ALLOY	Au/NI Plated							CHECKED BY
2	CONTACT	1SET	COPPER ALLOY	Au/NI Plated	APPROVED BY	David Chen	DATE	'16.10.16			
1	HOUSING	1PCS	HIGH TEMPERATURE PLASTIC	BLACK							
NO.	DESCRIPTION	QTY	MATERIAL	PLATING							