
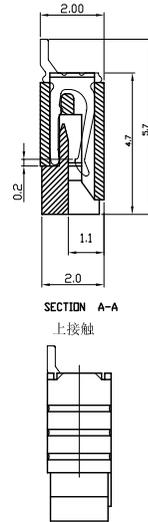

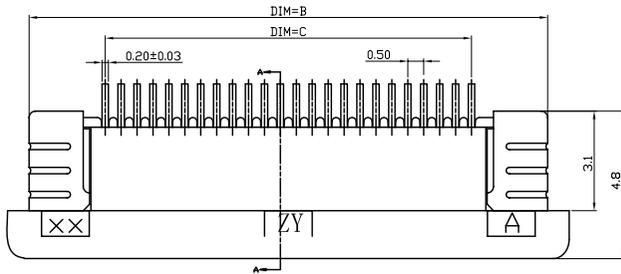
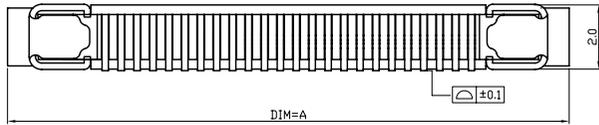


RoHS Compliant

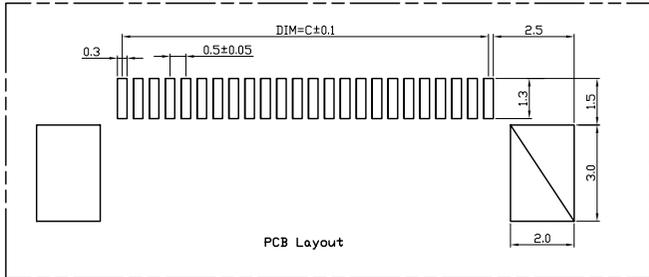

Electrical Characteristics:

Current rating: 0.4A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: $\leq 20m\Omega$
Insulation resistance: $\geq 500M\Omega$
Relative Humidity: 93%+40°C

Material Description:

Terminal: Phosphor Bronze Tin-plated
Fitting Nail: Brass Tin-plated
Housing: Thermoplastic(UL94V-0)
Slider: Thermoplastic(UL94V-0)

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
60P	35.60	34.50	29.50	30.65
59P	35.10	34.00	29.00	30.15
58P	34.60	33.50	28.50	29.65
57P	34.10	33.00	28.00	29.15
56P	33.60	32.50	27.50	28.65
55P	33.10	32.00	27.00	28.15
54P	32.60	31.50	26.50	27.65
53P	32.10	31.00	26.00	27.15
52P	31.60	30.50	25.50	26.65
51P	31.10	30.00	25.00	26.15
50P	30.60	29.50	24.50	25.65
49P	30.10	29.00	24.00	25.15
48P	29.60	28.50	23.50	24.65
47P	29.10	28.00	23.00	24.15
46P	28.60	27.50	22.50	23.65
45P	28.10	27.00	22.00	23.15
44P	27.60	26.50	21.50	22.65
43P	27.10	26.00	21.00	22.15
42P	26.60	25.50	20.50	21.65
41P	26.10	25.00	20.00	21.15
40P	25.60	24.50	19.50	20.65
39P	25.10	24.00	19.00	20.15
38P	24.60	23.50	18.50	19.65
37P	24.10	23.00	18.00	19.15
36P	23.60	22.50	17.50	18.65
35P	23.10	22.00	17.00	18.15

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6				
5				
4				
3				
2				
1				

PART NAME	FPC CONNECTOR	*LVE LAKE-VIEW ELECTRONICS CO., LTD.			
PART No.	FPC-0520P-XXU (35PIN-60PIN)				
DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
CHECKED BY	DELIANG LIU	VER	1.0	ANGLES	$\pm 2^\circ$
APPROVED BY	David Chen	SHEET	1 OF 1	TOLERANCE	30≤L ±0.50
		DATE	'08.05.16		10≤L≤30 ±0.40