

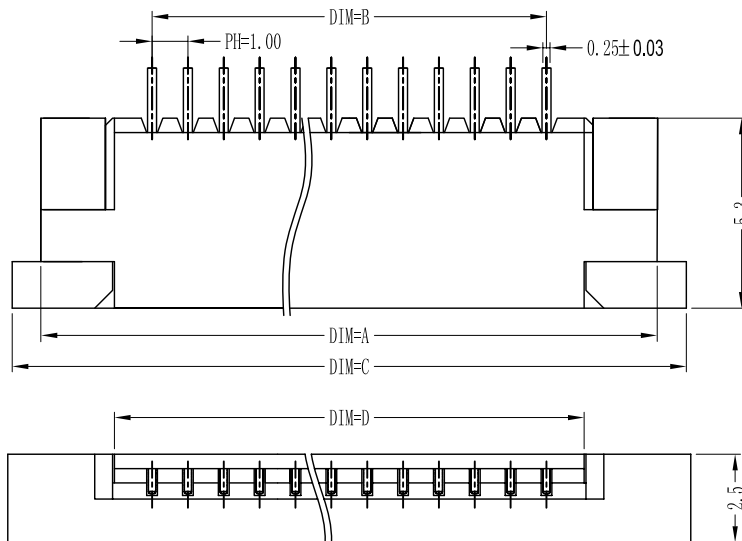


RoHS Compliant

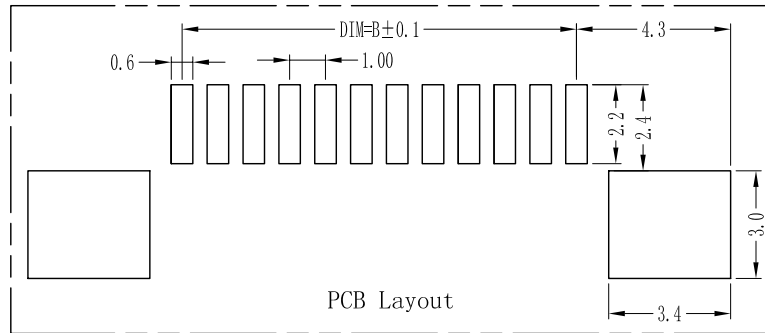

Electrical Characteristics:
Current rating: 0.5A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: $\leq 20m\Omega$
Insulation resistance: $\geq 800M\Omega$
Relative Humidity: 93%+40°C

Material Description:
Terminal: Phosphor Bronze Tin-plated
Fitting Nail: Brass Tin-plated
Housing: Thermoplastic(UL94V-0)
Slider: Thermoplastic(UL94V-0)



上接触

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
30P	35.1	29.00	37.0	31.10
29P	34.1	28.00	36.0	30.10
28P	33.1	27.00	35.0	29.10
27P	32.1	26.00	34.0	28.10
26P	31.1	25.00	33.0	27.10
25P	30.1	24.00	32.0	26.10
24P	29.1	23.00	31.0	25.10
23P	28.1	22.00	30.0	24.10
22P	27.1	21.00	29.0	23.10
21P	26.1	20.00	28.0	22.10
20P	25.1	19.00	27.0	21.10
19P	24.1	18.00	26.0	20.10
18P	23.1	17.00	25.0	19.10
17P	22.1	16.00	24.0	18.10
16P	21.1	15.00	23.0	17.10
15P	20.1	14.00	22.0	16.10
14P	19.1	13.00	21.0	15.10
13P	18.1	12.00	20.0	14.10
12P	17.1	11.00	19.0	13.10
11P	16.1	10.00	18.0	12.10
10P	15.1	9.00	17.0	11.10
9P	14.1	8.00	16.0	10.10
8P	13.1	7.00	15.0	9.10
7P	12.1	6.00	14.0	8.10
6P	11.1	5.00	13.0	7.10
5P	10.1	4.00	12.0	6.10
4P	9.1	3.00	11.0	5.10

PART NAME FPC CONNECTOR


PART No. FPC-1025P-XXU

DESIGNER YAOFEI WANG

CHECKED BY DELIANG LIU

APPROVED BY David Chen

LVE LAKE-VIEW ELECTRONICS CO., LTD.

VIEW  UNIT mm

VER 1.1 ANGLES $\pm 2^\circ$

SHEET 1 OF 1 TOLERANCE

DATE '15.12.08 TOLERANCE

30≤L ±0.50

10≤L≤30 ±0.40

L≤10 ±0.25