

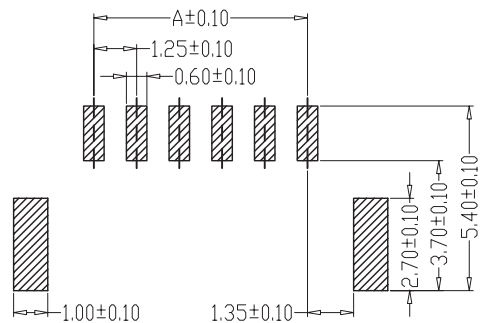
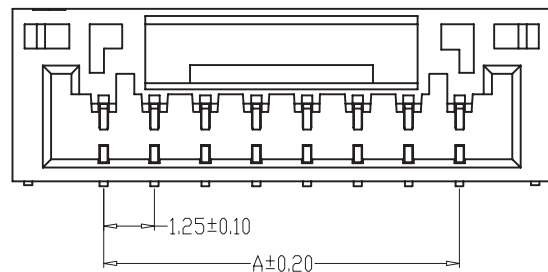




RoHS Compliant



PCB LAYOUT

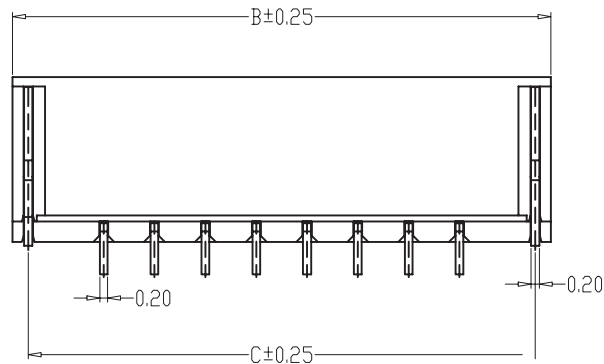

7A



2-6A

Part No.	A	B	C
A1254LFH-02A	1.25	5.75	4.95
A1254LFH-03A	2.50	7.00	6.20
A1254LFH-04A	3.75	8.25	7.45
A1254LFH-05A	5.00	9.50	8.70
A1254LFH-06A	6.25	10.75	9.95
A1254LFH-07A	7.50	12.00	11.20
A1254LFH-08A	8.75	13.25	12.45
A1254LFH-09A	10.00	14.50	13.70
A1254LFH-10A	11.25	15.75	14.95
A1254LFH-11A	12.50	17.00	16.20
A1254LFH-12A	13.75	18.25	17.45
A1254LFH-15A	17.50	22.00	21.20

SPECIFICATION:

- 1.RATING: 100V AC/DC 1A Max.
- 2.CONTACT RESISTANCE: 20mΩ Max(DC 5V)
- 3.INSULATION RESISTANCE: 500MΩ Min(DC 100V)
- 4.WITHSTAND VOLTAGE: AC 500V (50~60Hz For1 1min)
- 5.ELECTRICALLY LIFE: 5,000 cycles Min
- 6.AMBIENT TEMPERATURE: -25°C~+85°C

6					PART NAME	Wire to Board Connector	LAKE-VIEW ELECTRONICS CO., LTD.			
5					PART No.	A1254LFH-xxA				
4					DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3					CHECKED BY	DELIANG LIU	VER	1.1	ANGLES	± 1.5°
2					APPROVED BY	David Chen	SHEET	1 OF 1	TOLERANCE	30≤L ± 0.50
1							DATE	'07.08.16		10≤L≤30 ± 0.30
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ± 0.20