
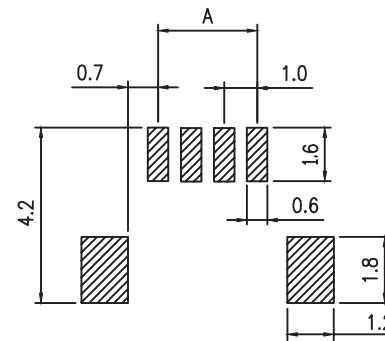

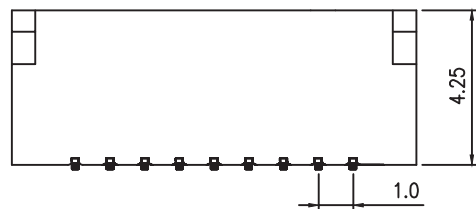


RoHS Compliant

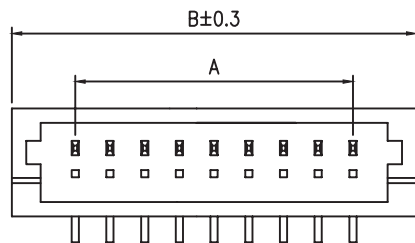


P.C.B.LAYOUT

SPECIFICATION:

- 1.RATING: 50V AC/DC 0.5A Max.
- 2.CONTACT RESISTANCE: 20mΩ Max(DC 5V)
- 3.INSULATION RESISTANCE: 100MΩMin(DC 100V)
- 4.WITHSTAND VOLTAGE: AC 500V (50~60Hz For1 1min)
- 5.ELECTRICALLY LIFE: 5,000 cycles Min
- 6.AMBIENT TEMPERATURE: -40°C~+105°C
- 7.SOLDERING TEMPERATURE: 260±5°C 3s

TABLE :

Poles	Dimension: mm	
	A	B
2	1.0	4.0
3	2.0	5.0
4	3.0	6.0
5	4.0	7.0
6	5.0	8.0
7	6.0	9.0
8	7.0	10.0
9	8.0	11.0
10	9.0	12.0
11	10.0	13.0
12	11.0	14.0
13	12.0	15.0
14	13.0	16.0
15	14.0	17.0
16	15.0	18.0
17	16.0	19.0
18	17.0	20.0
19	18.0	21.0
20	19.0	22.0

6					PART NAME	Wire to Board Connector	 LAKE-VIEW ELECTRONICS CO., LTD.			
5										
4					PART No.	A1001-SV	VIEW		UNIT	mm
3							VER	1.1	ANGLES	± 1.5°
2					CHECKED BY	DELIANG LIU	SHEET	1 OF 1	TOLERANCE	30≤L ± 0.50
1					APPROVED BY	David Chen	DATE	'07.08.16		10≤L≤30 ± 0.30
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ± 0.20