
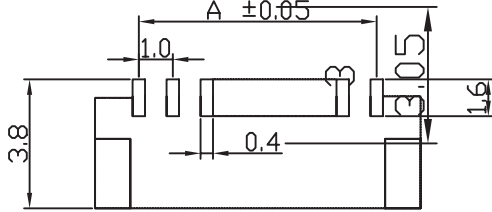



RoHS Compliant



P.C.B.LAYOUT




TABLE :

20	19.0	22.0	21.3
19	18.0	21.0	20.3
18	17.0	20.0	19.3
17	16.0	19.0	18.3
16	15.0	18.0	17.3
15	14.0	17.0	16.3
14	13.0	16.0	15.3
13	12.0	15.0	14.3
12	11.0	14.0	13.3
11	10.0	13.0	12.3
10	9.0	12.0	11.3
9	8.0	11.0	10.3
8	7.0	10.0	9.3
7	6.0	9.0	8.3
6	5.0	8.0	7.3
5	4.0	7.0	6.3
4	3.0	6.0	5.3
3	2.0	5.0	4.3
2	1.0	4.0	3.3
Poles	A	B	C

SPECIFICATION:

- 1.RATING: 50V AC/DC 0.5A Max.
2.CONTACT RESISTANCE: 20mΩ Max(DC 5V)
3.INSULATION RESISTANCE: 800MΩ Min(DC 100V)
4.WITHSTAND VOLTAGE: AC 500V (50~60Hz For1 1min)
5.ELECTRICALLY LIFE: 5,000 cycles Min
6.AMBIENT TEMPERATURE: -40°C~+105°C
7.SOLDERING TEMPERATURE: 360±5°C 3s

6					PART NAME	Wire to Board Connector	LAKE-VIEW ELECTRONICS CO., LTD.			
5										
4					PART No.	A1001-SR	VIEW		UNIT	mm
3							VER	1.1	ANGLES	± 1.5°
2					CHECKED BY	DELIANG LIU	SHEET	1 OF 1	TOLERANCE	30≤L ± 0.50
1					APPROVED BY	David Chen	DATE	'07.08.16		10≤L≤30 ± 0.30
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ± 0.20