
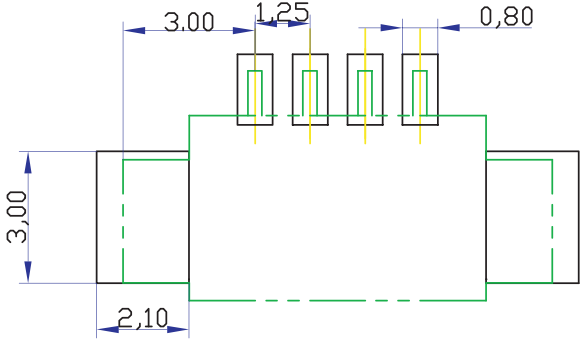
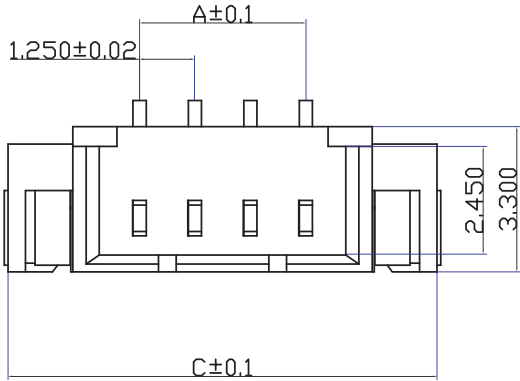
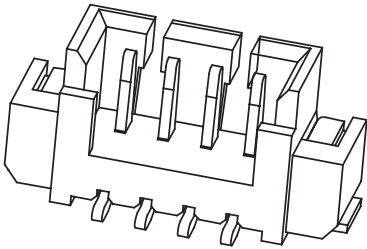



RoHS Compliant

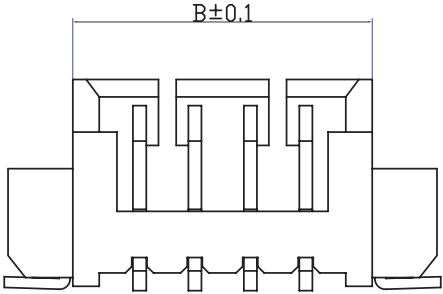

PCB LAYOUT

CIRCUIT	A	B	C
2P	1.25	4.30	7.00
3P	2.50	5.55	8.25
4P	3.75	6.80	9.50
5P	5.00	8.05	10.75
6P	6.25	9.30	12.00
7P	7.50	10.55	13.25
8P	8.75	11.80	14.50
9P	10.00	13.05	15.75
10P	11.25	14.30	17.00
11P	12.50	15.55	18.25
12P	13.75	16.80	19.50
13P	15.00	18.05	20.75
14P	16.25	19.30	22.00
15P	17.50	20.55	23.25
16P	18.75	21.80	24.50
17P	20.00	23.05	25.75
18P	21.25	24.30	27.00
19P	22.50	25.55	28.25
20P	23.75	26.80	29.50

- SPECIFICATION:
- 1.RATING: 100V AC/DC 1A Max.
 - 2.CONTACT RESISTANCE: 20mΩ Max(DC 5V)
 - 3.INSULATION RESISTANCE: 500MΩ Min(DC 100V)
 - 4.WITHSTAND VOLTAGE: AC 500V (50~60Hz For1 1min)
 - 5.ELECTRICALLY LIFE: 5,000 cycles Min
 - 6.AMBIENT TEMPERATURE: -25°C~+85°C

6					PART NAME	Wire to Board Connector	LAKE-VIEW ELECTRONICS CO., LTD.			
5					PART No.	A1251-SV				
4					DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3					CHECKED BY	DELIANG LIU	VER	1.1	ANGLES	± 1.5°
2					APPROVED BY	David Chen	SHEET	1 OF 1	TOLERANCE	30≤L ± 0.50
1							DATE	'07.08.16		10≤L≤30 ± 0.30
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ± 0.20