

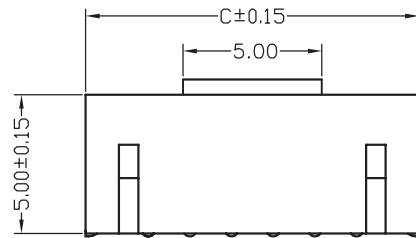





RoHS Compliant

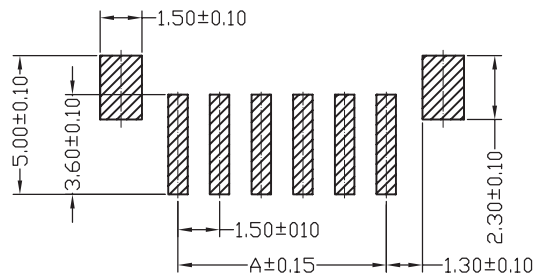


3-16PIN

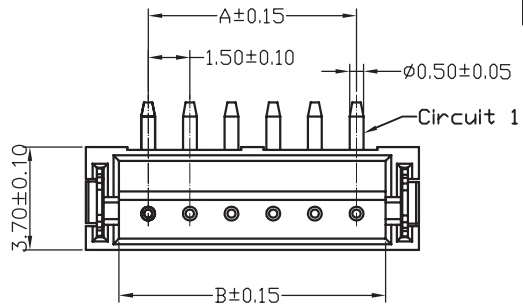

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

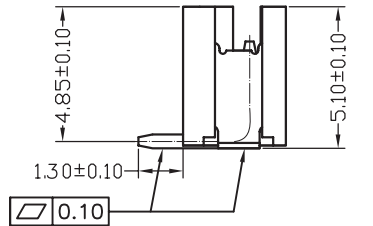

2PIN



Circuits	Dimensions		
	A	B	C
02	1.50	3.60	6.00
03	3.00	5.10	7.50
04	4.50	6.60	9.00
05	6.00	8.10	10.50
06	7.50	9.60	12.00
07	9.00	11.10	13.50
08	10.50	12.60	15.00
09	12.00	14.10	16.50
10	13.50	15.60	18.00
11	15.00	17.10	19.50
12	16.50	18.60	21.00
13	18.00	20.10	22.50
14	19.50	21.60	24.00
15	21.00	23.10	25.50
16	22.50	24.60	27.00

SPECIFICATION:

- 1.RATING: 50V AC/DC 1A Max.
- 2.CONTACT RESISTANCE: 20mΩ Max(DC 5V)
- 3.INSULATION RESISTANCE: 500MΩ Min(DC 100V)
- 4.WITHSTAND VOLTAGE: AC 500V (50~60Hz For1 1min)
- 5.ELECTRICALLY LIFE: 5,000 cycles Min
- 6.AMBIENT TEMPERATURE: -25°C~+105°C

6					PART NAME	Wire to Board Connector	*LVE* LAKE-VIEW ELECTRONICS CO., LTD.			
5					PART No.	A1501AWV-xxP				
4					DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3					CHECKED BY	DELIANG LIU	VER	1.1	ANGLES	± 1.5°
2					APPROVED BY	David Chen	SHEET	1 OF 1	TOLERANCE	30≤L ± 0.50
1							DATE	'07.08.16		10≤L≤30 ± 0.30
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ± 0.20