
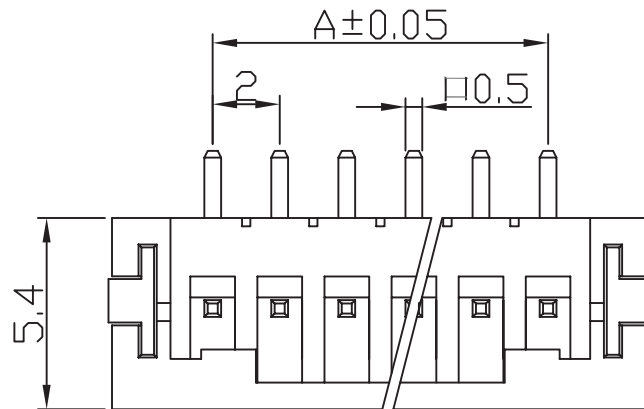
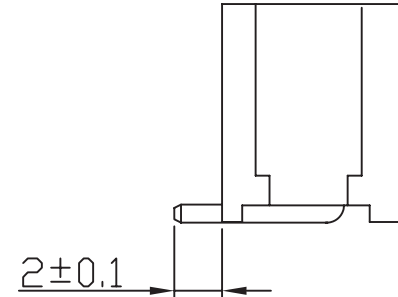


RoHS Compliant

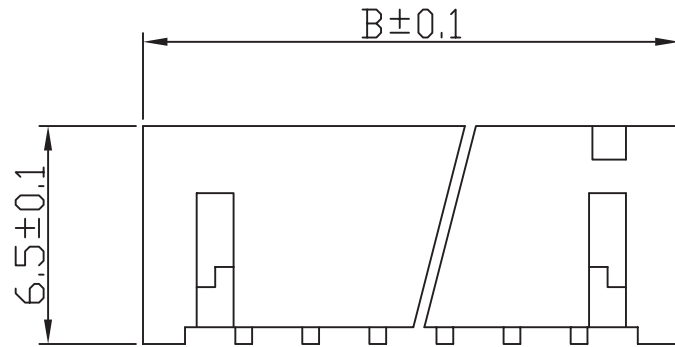

SPECIFICATION:

- 1.RATING: 100V AC/DC 2A Max.
- 2.CONTACT RESISTANCE: 20mΩ Max(DC 5V)
- 3.INSULATION RESISTANCE: 1000MΩ Min(DC 100V)
- 4.WITHSTAND VOLTAGE: AC 500V (50~60Hz For1 1min)
- 5.ELECTRICALLY LIFE: 5,000 cycles Min
- 6.AMBIENT TEMPERATURE: $-40^{\circ}\text{C} \sim +10^{\circ}\text{C}$
- 7.SOLDERING TEMPERATURE: $260 \pm 5^{\circ}\text{C}$ 3s

Circuits	Dimension	
	A	B
2	2.0	8.0
3	4.0	10.0
4	6.0	12.0
5	8.0	14.0
6	10.0	16.0
7	12.0	18.0
8	14.0	20.0
9	16.0	22.0
10	18.0	24.0
11	20.0	26.0
12	22.0	28.0
13	24.0	30.0
14	26.0	32.0
15	28.0	34.0
16	30.0	36.0

6					PART NAME	Wire to Board Connector	LAKE-VIEW ELECTRONICS CO., LTD.			
5										
4					PART No.	A2001-SV	VIEW		UNIT	mm
3							VER	1.1	ANGLES	$\pm 1.5^{\circ}$
2					CHECKED BY	DELIANG LIU	SHEET	1 OF 1	TOLERANCE	$30 \leq L$ ± 0.50
1					APPROVED BY	David Chen	DATE	'07.08.16		$10 \leq L \leq 30$ ± 0.30
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						$L \leq 10$ ± 0.20