
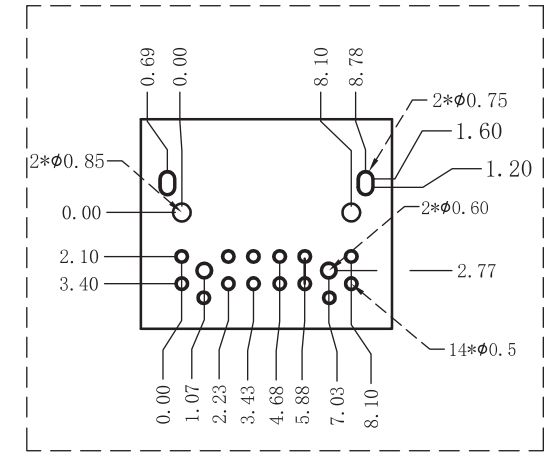
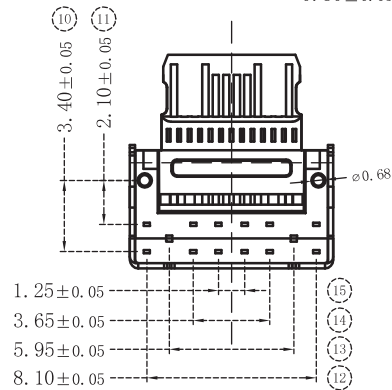
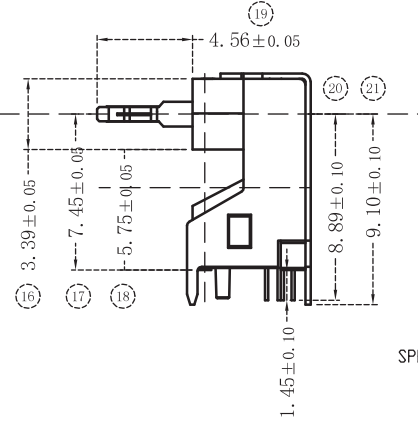




RoHS Compliant

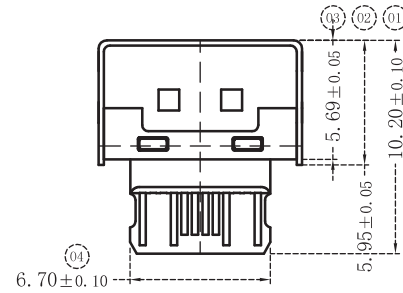

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

SPECIFICATIONS:

1.Material:


InsertMolding:LCP UL 94V-0 Black
Contact:Copper alloy C2680-EH,T=0.15mm
Shell:Stainless Steel,T=0.30mm

2.Electrical

- 1.1.Rated Voltage:30V AC/DC maximum
- 1.2.CURRENT RATING: VBUS 4A,
OTHER PIN 0.25A MIN.
- 1.2.INSULATION RESISTANCE:100MΩ MIN
- 1.2.CONTACT RESISTANCE:50mΩ MAX

3.Mechanical

- 2.3.INSERT FORCE: 5~20N;
- 2.3.EXTRACT FORCE:INITIAL 8~20N,
AFTER 10000 CYCLES 6~20N;
- 2.3.DURABILITY: 10000 CYCLES
- 4.Ambient Temperature:-55°C To +85°C

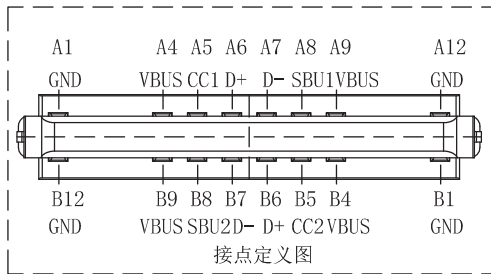

USB TYPE-C PIN ASSIGNMENTS

6	SHELL	1PCS	STAINLESS STEEL	NI Plated	PART NAME	PD TYPE-CF 20W中美规	*LVE 雷克维尔电子有限公司 LAKE-VIEW ELECTRONICS CO., LTD.			
5	SHIELDING PLATE	1PCS	STAINLESS STEEL	---	PART No.	CU3-APHx-xxxx				
4	MD	1PCS	HIGH TEMPERATURE PLASTIC		DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3	CONTACT	1SET	COPPER ALLOY	Au/Ni Plated	CHECKED BY	DELIANG LIU	VER	1.4	ANGLES	± 1.5°
2	CONTACT	1SET	COPPER ALLOY	Au/Ni Plated	APPROVED BY	David Chen	SHEET	1 OF 1	TOLERANCE	30≤L ±0.30
1	HOUSING	1PCS	HIGH TEMPERATURE PLASTIC				DATE	'22.09.13		10≤L≤30 ±0.20
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ±0.20