
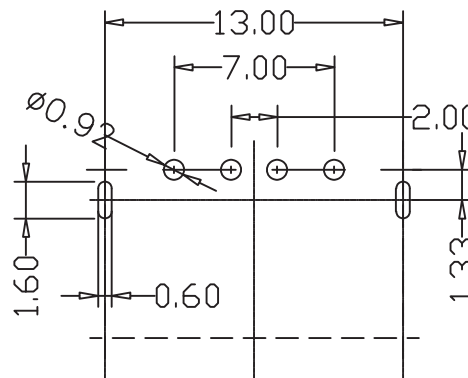

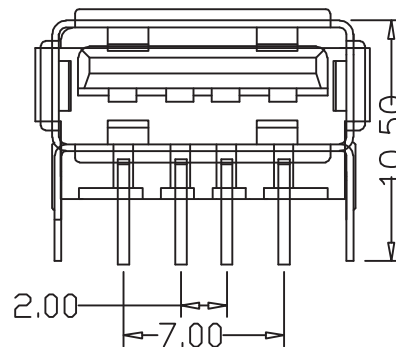


RoHS Compliant

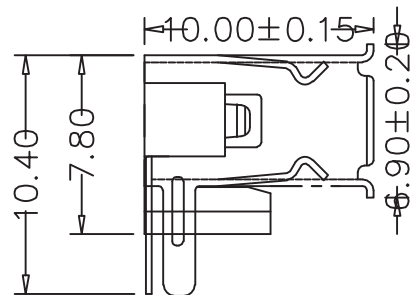

SPECIFICATIONS

1)Electrical:

- 1.1 Contact Resistance: 30 m Ω Max
- 1.2 Insulation Resistance: 1000M Ω Min
- 1.3 Withstanding Voltage: 500V DC
- 1.4 Current rating: 2 AMP Max.
- 1.5 Total Mating Force: 40N Max.
- 1.6 Total Unmating force: 4N Min.
- 1.7temperature Rage: -55°~ +105°

2) Material :

- 2.1 Shell : **Steel** Alloy,T=0.30mm
- 2.2 Contact: Copper Alloy ,T=0.25mm
- 2.2 **Housing: PBT**

3)Finishing:

- 3.1 Plating: Au 1u" ON CONTACT AREA
- 3.2 Plating: Ni 100 u" Min. ON Shell

RECOMMEND PCB LAYOUT

6					PART NAME	USB JACK	*LVE* 雷克维尔电子有限公司 LAKE-VIEW ELECTRONICS CO., LTD.			
5					PART No.	BU-482x10-F2L				
4					DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3	SHELL	1	Steel		CHECKED BY	DELIANG LIU	VER	1.2	ANGLES	± 1.5°
2	TERMINALS	4	Copper		APPROVED BY	David Chen	SHEET	1 OF 1	TOLERANCE	30≤L ±0.30
1	HOUSING	1	Hi-Temp PBT				DATE	'12.06.10		10≤L≤30 ±0.20
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ±0.20