

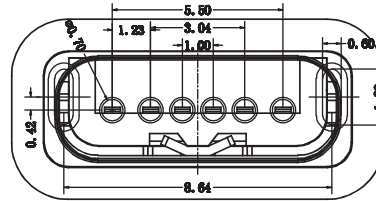
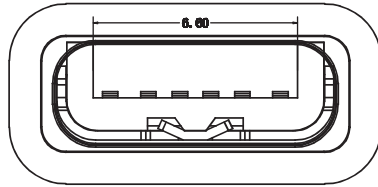
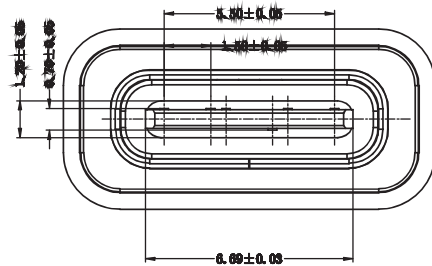


RoHS Compliant

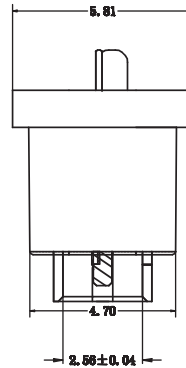

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

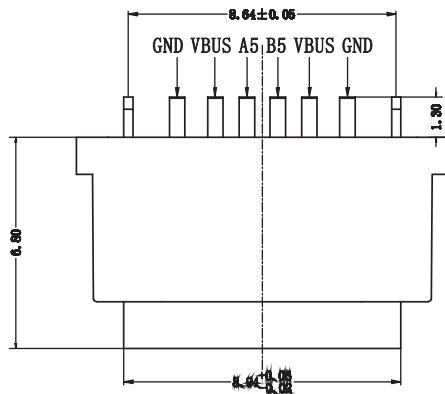


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

建议使用防水圈尺寸

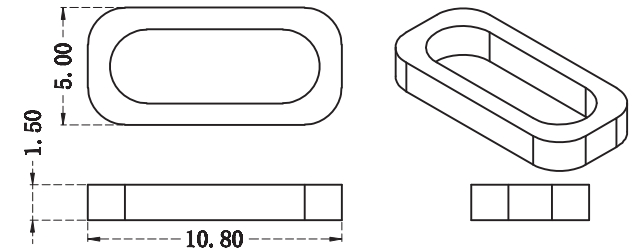

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6					PART NAME	USB Type-C 6P Female 防水	*LVE* LAKE-VIEW ELECTRONICS CO., LTD.			
5	SHELL	1PCS	STAINLESS STEEL	NI Plated	PART No.	CUP-V106-A				
4	SHIELDING PLATE	1PCS	STAINLESS STEEL	NI Plated	DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3	CONTACT	1SET	COPPER ALLOY	TIN/Au/NI Plated	CHECKED BY	DELIANG LIU	VER	1.2	ANGLES	$\pm 1.5^{\circ}$
2	SHELL HOUSING	1PCS	HIGH TEMPERATURE PLASTIC	BLACK	APPROVED BY	David Chen	SHEET	1 OF 2	TOLERANCE	30≤L ±0.30
1	HOUSING	1PCS	HIGH TEMPERATURE PLASTIC	BLACK			DATE	'18.05.13		10≤L≤30 ±0.20
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ±0.20