

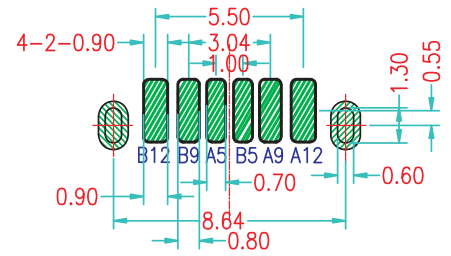
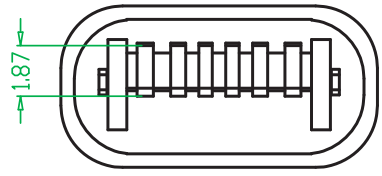
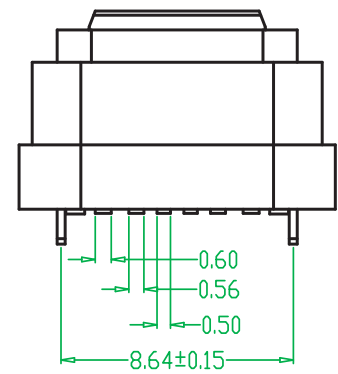

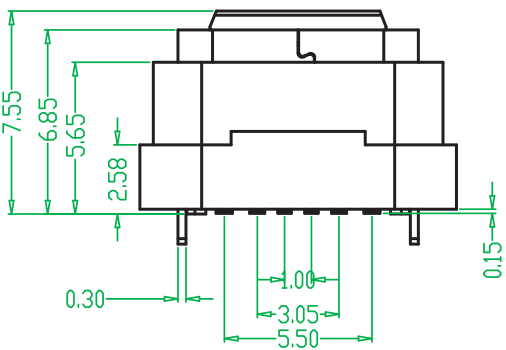


RoHS Compliant



TOLERANCE UNSPECIFIED ±0.05mm

- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. LNSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES
 9. WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.

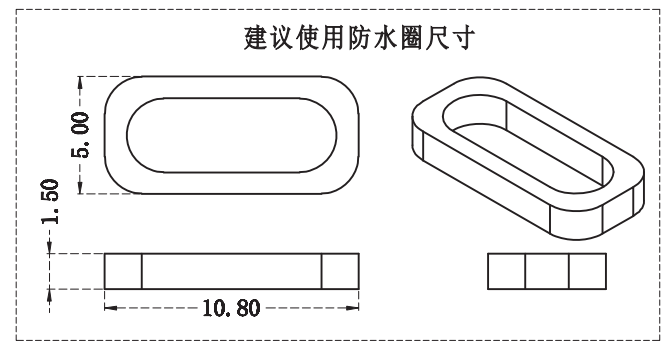

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6					PART NAME	USB Type-C 6P Female 防水	*LVE* LAKE-VIEW ELECTRONICS CO., LTD.			
5	SHELL	1PCS	STAINLESS STEEL	NI Plated	PART No.	CUP-V206-A				
4	SHIELDING PLATE	1PCS	STAINLESS STEEL	NI Plated	DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3	CONTACT	1SET	COPPER ALLOY	TIN/Au/NI Plated	CHECKED BY	DELIANG LIU	VER	1.2	ANGLES	± 1.5°
2	SHELL HOUSING	1PCS	HIGH TEMPERATURE PLASTIC	BLACK	APPROVED BY	David Chen	SHEET	1 OF 2	TOLERANCE	30≤L ± 0.30
1	HOUSING	1PCS	HIGH TEMPERATURE PLASTIC	BLACK			DATE	'18.05.13		10≤L≤30 ± 0.20
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L≤10 ± 0.20