

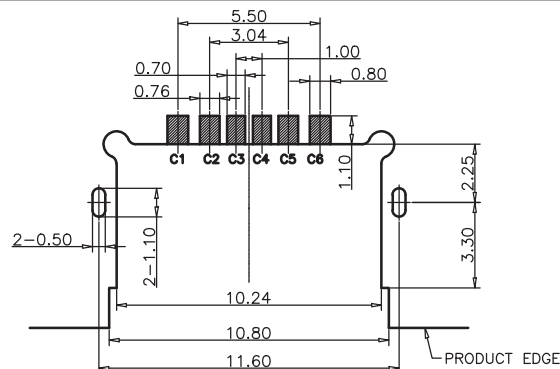
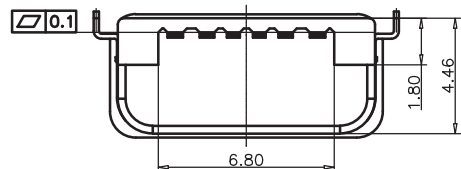






RoHS Compliant



RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05




加防水圈示意图

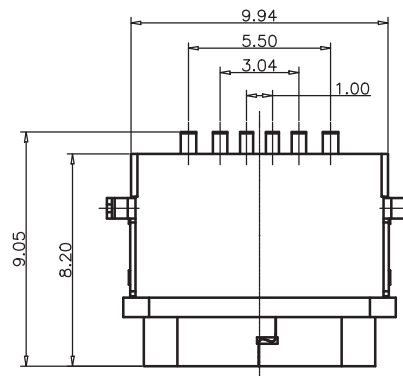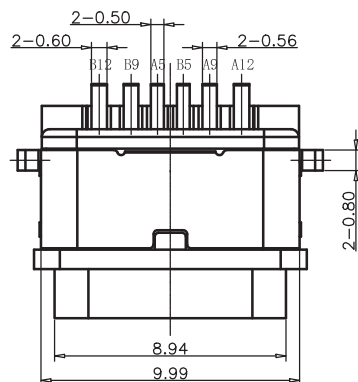

NOTES:

SPECIFICATION:

- 1.CURRENT RATING: 3.0A MAX
- 2.VOLTAGE: 100 VAC
- 3.TEMPERATURE RANGE: -30°C~+85°C
- 4.CONTACT RESISTANCE: 40 MILLIONHM MAX
- 5.INSULATION RESISTANCE: 100 MEGOHMS MIN
- 6.INSERTION FORCE: 5N~20N
- 7.UNMATING FORCE: 8N~20N
- 8.DURABILITY: 10000 CYCLES
- 9.WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.



A12	GND	B5	CC2
A9	VBUS	B9	VBUS
A5	CC1	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6					PART NAME	Type-C 6P防水 沉板后二脚	* LVE LAKE-VIEW ELECTRONICS CO., LTD.			
5	SHELL	1PCS	STAINLESS STEEL	NI Plated	PART No.	CUP-H206-DS2				
4	SHIELDING PLATE	1PCS	STAINLESS STEEL	NI Plated	DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3	CONTACT	1SET	COPPER ALLOY	TIN/Au/NI Plated	CHECKED BY	DELIANG LIU	VER	1.2	ANGLES	$\pm 1.5^\circ$
2	SHELL HOUSING	1PCS	HIGH TEMPERATURE PLASTIC	BLACK	APPROVED BY	David Chen	SHEET	1 OF 2	TOLERANCE	30 $\leq$ L ± 0.30
1	HOUSING	1PCS	HIGH TEMPERATURE PLASTIC	BLACK			DATE	'19.08.16		10 $\leq$ L $\leq$ 30 ± 0.20
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						L $\leq$ 10 ± 0.20