

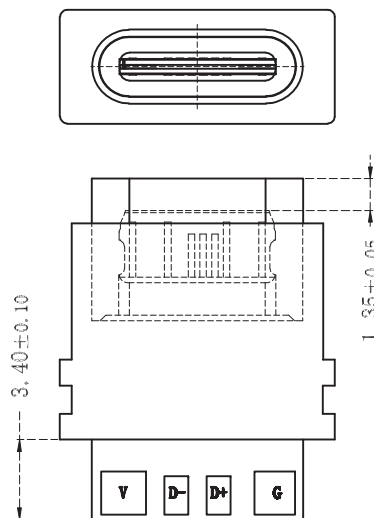
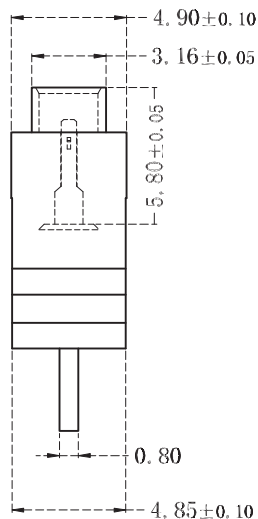


RoHS Compliant

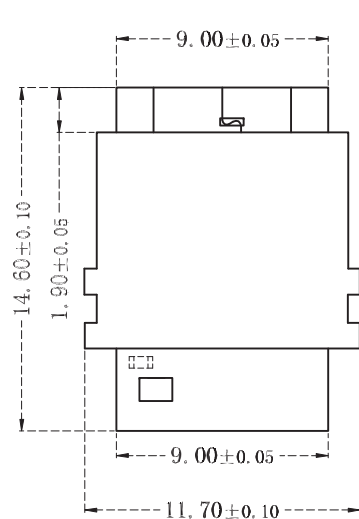

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

焊盘	G	D+	D-	V		
针位	A1 A12 B1 B12	A6 B6	A7 B7	A4 A9 B4 B9		
焊盘	G					
针位	A1 A12 B1 B12					
备注:						

6					PART NAME	USB 3.1 Type-C Female 包塑	*LVE* LAKE-VIEW ELECTRONICS CO., LTD.				
5					PART No.	CUP-V414-D					
4							VIEW		UNIT	mm	
3					DESIGNER	YAOFEI WANG	VER	1.2	ANGLES	± 1.5°	
2					CHECKED BY	DELIANG LIU	SHEET	2 OF 2	TOLERANCE	30≤L	± 0.30
1										10≤L≤30	± 0.20
NO.	DESCRIPTION	QTY	MATERIAL	PLATING	APPROVED BY	David Chen	DATE	'15.05.13		L≤10	± 0.20