

RoHS Compliant

NOTES:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC  
UL94V\_0,COLOR:BLACK.

CONTACT: COPPER ALLOYS.

COVER: COPPER ALLOYS OR STEEL.

2.PLATING:

UNDERPLATE: NICKEL.

CONTACT AREA: GOLD OVER NICKEL.

SOLDER AREA: TIN OVER NICKEL.




3.MULTIMEDIA CARD COMPATIBLE

4.MECHANICAL CHARACTERISTICS :

4-1.INSERTION FORCE : 5N~40N .







4-2.EXTRACTION FORCE : 5N~40N .

4-3.DURABILITY : 5,000 MATING CYCLES.



SD CARD PIN DESIGN

| PIN NO. | NAME    | TYPE   | DESCRIPTION                 |
|---------|---------|--------|-----------------------------|
| #1      | CD/DAT3 | I/O/PP | CARD DETECT/DATA LINE(BIT3) |
| #2      | CMD     | PP     | COMMAND/RESPONSE            |
| #3      | VSS1    | S      | SUPPLY VOLTAGE GROUND       |
| #4      | VDD     | S      | SUPPLY VOLTAGE              |
| #5      | CLK     | I      | CLOCK                       |
| #6      | VSS2    | S      | SUPPLY VOLTAGE GROUND       |
| #7      | DAT0    | I/O/PP | DATA LINE(BIT 0)            |
| #8      | DAT1    | I/O/PP | DATA LINE(BIT 1)            |
| #9      | DAT2    | I/O/PP | DATA LINE(BIT 2)            |

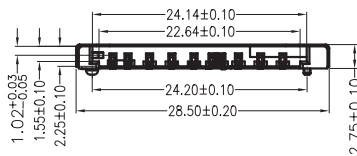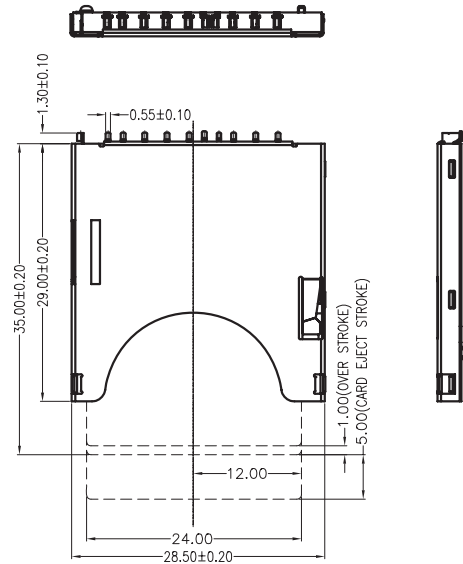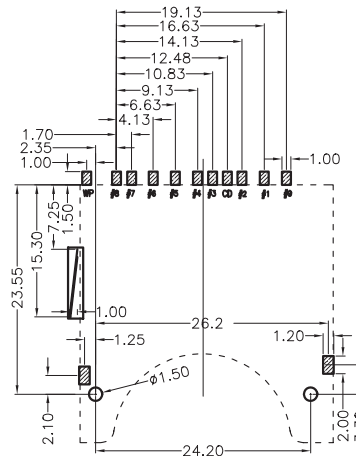


SD CARD

|                                      |  |  |  |  |             |                |  |          |           |               |
|--------------------------------------|--|--|--|--|-------------|----------------|--|----------|-----------|---------------|
| 6                                    |  |  |  |  | PART NAME   | SD CARD SOCKET | <b>*LVE*</b> LAKE-VIEW ELECTRONICS CO., LTD. |          |           |               |
| 5                                    |  |  |  |  | PART No.    | SDS2-L0-GS     |  |          |           |               |
| 4                                    |  |  |  |  | DESIGNER    | YAOFEI WANG    | VIEW   |          | UNIT      | mm            |
| 3                                    |  |  |  |  | CHECKED BY  | DELIANG LIU    | VER  | 1.0      | ANGLES    | ±2°           |
| 2                                    |  |  |  |  | APPROVED BY | DAVID CHEN     | SHEET  | 1 OF 2   | TOLERANCE | 30≤L ±0.50    |
| 1                                    |  |  |  |  |             |                | DATE   | '10.5.16 |           | 10≤L≤30 ±0.40 |
| NO. DESCRIPTION QTY MATERIAL PLATING |  |  |  |  |             |                |  |          |           | L≤10 ±0.25    |

RoHS Compliant

每盘40PCS

吸塑盘




吸塑盘规格: 320\*215\*10

NO. 1

保护膜

顶盖


25层(1000PCS)



NO. 2

胶纸封箱


成品标签



纸箱规格: 340\*240\*150

NO. 4

每1000PCS一箱

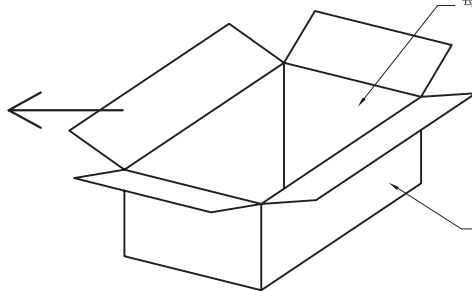

纸箱

NO. 3

1. 材质要求:

1. 1 纸箱的材质为B=B; 外形尺寸为340\*240\*150;

1. 2 PS盘的材质为PS, PS盘的外形尺寸320\*215\*10MM;



2. 包装要求:

2. 1 每一盘装40PCS;

2. 2 每25盘累叠在一起, 共计1Kset; 上面需放一个空盘, 后用PE膜缠绕;

2. 3 把累叠好的PS盘放入纸箱中;

2. 4 把包装好的成品打包封箱, 并在纸箱中贴上标签;

|     |             |     |          |         |             |                |   |   |           |               |
|-----|-------------|-----|----------|---------|-------------|----------------|---|---|-----------|---------------|
| 6   |             |     |          |         | PART NAME   | SD CARD SOCKET |  LAKE-VIEW ELECTRONICS CO., LTD. |   |           |               |
| 5   |             |     |          |         | PART No.    | SDS2-L0-GS     |   |   |           |               |
| 4   |             |     |          |         |             |                | VIEW  |  | UNIT      | mm            |
| 3   |             |     |          |         |             |                | VER   | 1.0   | ANGLES    | ±2°           |
| 2   |             |     |          |         | CHECKED BY  | DELIANG LIU    | SHEET   | 2 OF 2  | TOLERANCE | 30≤L ±0.50    |
| 1   |             |     |          |         | APPROVED BY | DAVID CHEN     | DATE  | '10.5.16  |           | 10≤L≤30 ±0.40 |
| NO. | DESCRIPTION | QTY | MATERIAL | PLATING |             |                |   |   |           | L≤10 ±0.25    |