
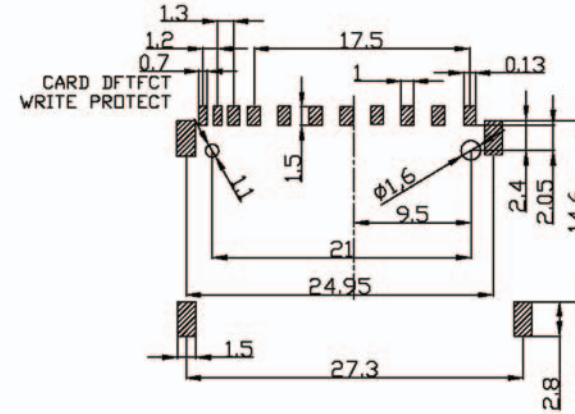


RoHS Compliant

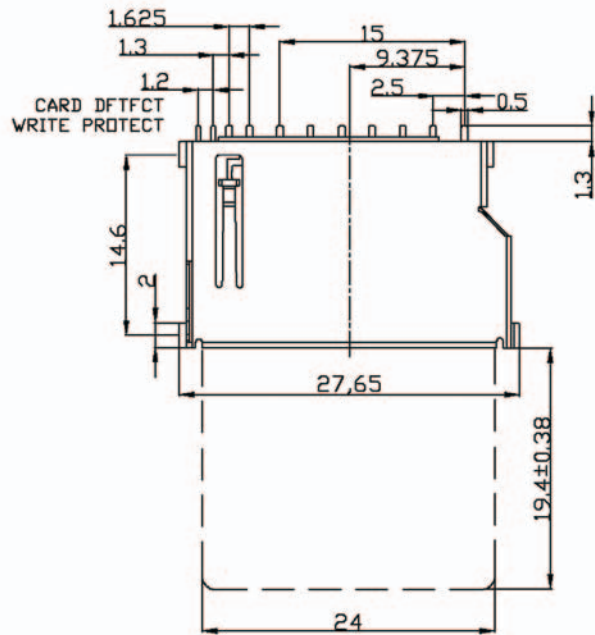

RECOMMENDED P.C.B. LAYOUT
(General tolerance ± 0.05)

NOTES:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.

CONTACT: COPPER ALLOYS.

COVER: COPPER ALLOYS OR STEEL.

2.PLATING:

UNDERPLATE: NICKEL.

CONTACT AREA: GOLD OVER NICKEL.

SOLDER AREA: TIN OVER NICKEL.

3.MULTIMEDIA CARD COMPATIBLE


4.MECHANICAL CHARACTERISTICS :

4-1.INSERTION FORCE : 5N~40N .

4-2.EXTRACTION FORCE : 5N~40N .

4-3.DURABILITY : 5,000 MATING CYCLES.

PIN NO.	NAME
#1	CD/DAT3
#2	CMD
#3	VSS1
#4	VDD
#5	CLK
#6	VSS2
#7	DAT0
#8	DAT1
#9	DAT2



SD CARD

6					PART NAME	SD CARD SOCKET	*LVE* LAKE-VIEW ELECTRONICS CO., LTD.			
5					PART No.	SDS2-N0-GF				
4					DESIGNER	YAOFEI WANG	VIEW		UNIT	mm
3					CHECKED BY	DELIANG LIU	VER	1.0	ANGLES	±2°
2					APPROVED BY	DAVID CHEN	SHEET	1 OF 2	TOLERANCE	30≤L ±0.50
1							DATE	'10.5.16		10≤L≤30 ±0.40
NO. DESCRIPTION QTY MATERIAL PLATING										L≤10 ±0.25